




Media Series
HD-518-210
Satin - Stainless Steel
Technical Data Sheet

Automatic Touch Free Sensor Hand Dryer
Surface Mounted

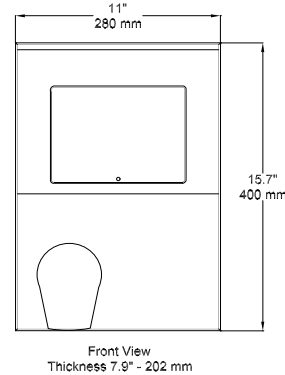

SPECIFICATIONS: Surface Mounted Automatic (touch free) Operation Hand Dryer. Infrared, self adjusting circuit operation. LCD Monitor: 7" TFT-LCD panel. High Resolution. Casing is fabricated of one piece Stainless Steel #304, 1.5 mm thick. Satin Finish. 2 Vandal-proof lock screws and key wrench. Brush Motor is 1/4 HP, 200 W, 5500 R.P.M. 20-25 seconds drying time. Weight is 17.6 lbs. (8 kgs). Dryer shall deliver 202 CFM with an air speed of 28 m/s. Sound level is 70 ± 3 db. Fixed Air nozzle is chrome plated zinc, rust proof and tamper resistant. The heater assembly is designed with 149 ° F (87 ° C) thermostat.

Dryer is approved.

OVERALL SIZE: 11" W x 15.7" H x 7.9" D
(280 mm W x 400 mm H x 202 mm D)

OPERATION: Shake excess water from hands. Place hands under the outlet to start operation. Dryer is activated when hands are placed 4-6 inches below spout. Rub hands lightly and rapidly. Dryer automatically powers off as soon as hands are removed. (For safety, the power will be cut off automatically in case of irregular use over 120 seconds.)

ADVERTISING OPERATION: LCD Monitor: 7" TFT-LCD panel. 800 Resolution. Power-on automatic playback function. Programmable power saving function. Supports playback repeat function. Remote-controlled operation. **Media Format:** MPEG 1 / 2 movie clips, JPEG photo, Mp3 music.
Supports 2 kinds of memory card: MMC and SD.

INSTALLATION: **WARNING:** Disconnect power before installation or servicing. This product is intended for installation by a qualified service person. Use AWG NO.12 solid conductor for wiring. All units must be supplied with a 3-wire service. The ground wire must be connected to the dryer's back plate. Failure to properly ground could result in sever electrical shock and/or death.

Fix the position card on the wall. Suitable height for hole "D" is 49" from ground. Drill 4 holes (A,B,C,D 5/16" (8 mm) diameter and 1 3/8" (35 mm) depth.) Install supplied anchors flush with wall face, or install fastening system suitable for wall conditions (not supplied) . Take off the mounting instruction sheet. Hammer dowels into the 4 holes. Remove the housing from the base plate; provide the power cord in wall to match knock out location on back plate or bring surface mounted conduit to bottom panel opening. Fix the base plate firmly onto the wall. Connect the live wire (colored red or brown) to the terminal block marked "L". Connect the neutral wire (colored black or blue) to the terminal block marked "N". Connect the ground wire (colored green and yellow) to the green screw. Attach housing back to base plate.

The manufacturer reserves the right, without formal notification, to implement changes to the design and dimensions.
© 2008 Columbia Accessories
Edition: HD-518-210/001



PO Box 181, Columbia, SC 29202
Phone: 1-866-820-3579 Fax: 1-866-317-2786
Web Site: <http://www.natpart.com>