


**Shower Seat  
Reversible Folding**

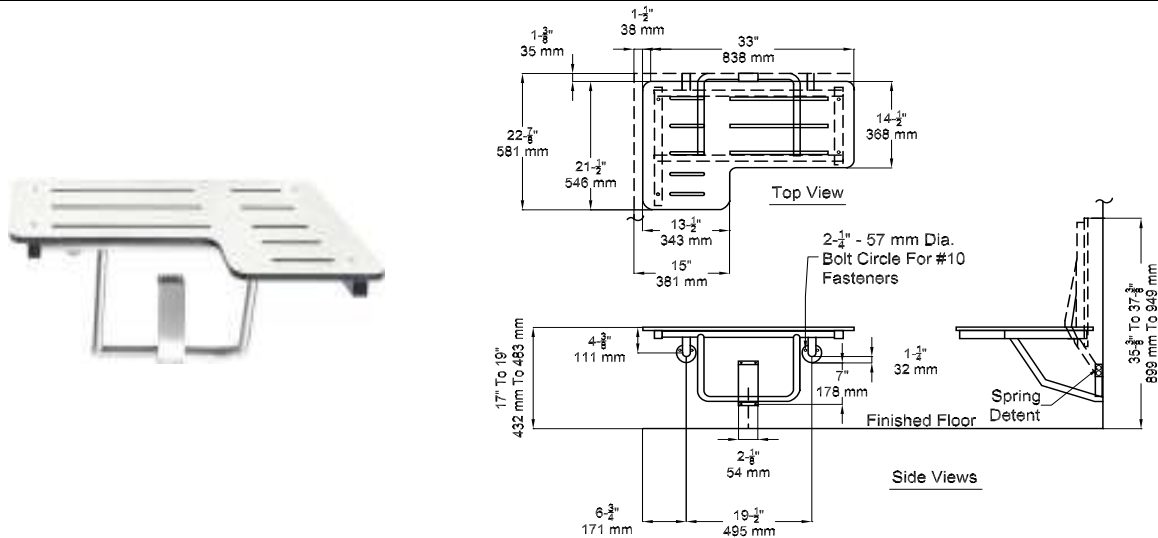

**MATERIALS:** "L-shaped" Phenolic Fold-up Shower Stall Seat will have all metal parts fabricated of 18-8 alloy type 304 stainless steel.

**OVERALL SIZE:** 33" W x 17" – 19" H x 22 7/8" D  
(838 mm W x 432 mm – 483 mm H x 581 mm D)

**SPECIFICATIONS:** "L-shaped" Phenolic Fold-up Shower Stall Seat will have all metal parts fabricated of 18-8 alloy type 304 stainless steel. Seat frame and support legs will be 1" (25mm) diameter and 1-1/4" (32mm) square x 18 gauge (1.2mm) with 3/16" (4.8mm) thick mounting flanges and 16 gauge (1.5mm) guide bracket/arm support. All exposed surfaces will have No 4 satin finish. Structural assembly will be of welded construction and all exposed edges and corners shall be burr free. Seat will be solid phenolic with ivory color top and bottom surfaces and shall have black edges. Support arm will fold up when in retracted position to provide low profile against wall. No extra fittings will be required to retain seat in storage position. Guide bracket will control seat lowering into operating position. Unit satisfies ADA Accessibility Guidelines when mounted properly.

**INSTALLATION:** This unit is surface mounted. Installer/construction contractor must provide concealed anchor plate or blocking as specified in construction documents or as required by local building codes prior to wall finishing. Fasten unit flanges and guide bracket to concealed anchor or blocking plate with appropriate hardware. Note that concealed mounting plates or anchors and hardware are not supplied with this product and must be specified separately. Ensure that mounting configuration complies with local building codes. Unit is reversible in the field for right or left hand installation.

**STRENGTH:** Product will be of adequate strength to support a load of 250 pounds (113.4 kg) and unit will conform to size and edge clearances as diagrammed. Mounting to the wall is a critical part of the system to meet this requirement. To withstand the shear, tension or pullout, and torsion loads generated by the maximum loading, the fastener system must be adequately sized. Unit is load rated to support a weight of 500 lbs at front edge when properly installed.